



/RZ 9) %ULGJH 5HFWLILHUV



)HDWXUHV

‡*ODVV 3DVVLYDWHG &KLS -XQFWLR

‡/RZ550

‡/RZ 9)

‡+LJK650

%HQHILWV

‡&DVH *%J

~V^!{ä}æ|•KÁÙ[|á^!æà|ÁÚ^!ÁTQŠÈÙVÖÈÍ€

‡Ü^á~&^áÁ[|, ^!Á[|••Áæ}áÁ•, äc&@ä}•Ác!æ}•äc[!

~Ü^á~&^áÁ•}~äää}*

0D[LPXP5DWLQDQGOHFWEKBD OFWHULVWLFV

5DWLQWVf&DPELMQWVSHUXDQDUMKHU/SVFLILHG


6LQJOH SKDVH KQ QIHZ/D VMUQGXFORVDHEDSDFLWEXHU GRDVEWH

3DUDPHWHU	6\PEROV	*% - /	8QLWV
0D[LPXP 5HSHWLWLYH 3HDN 59550	VH 9ROWDJH		9
0D[LPXP 506 YROWDJH	9506		9
0D[LPXP '& %ORFNLQJ 9ROWDJH &			9
\$YHUDJH 5HFWLILHG 2XWSXW &RUUHQW			\$
3HDN)RUZDUG 6XUJH &XUUHQW +DOI 6LQH :DYH 6XSHULPSRV, HGO RQ 5DWHG /RDG -('(& 0HWKRG	PV 6LQJOH RQ 5DWHG		\$
0D[LPX)RUZDUG WDW H \$	9)		9
0D[LPXP '& 5HYHUVH &XUUHQW #7\$ DW 5DWHG '& %ORFNLQJ 9ROWDJH #7\$	f & f &		\$
7\SLFDO -XQFWLRQ &RVSDFLWDQ&M			S)
2SHUDWLQJ DQG 6WRUDJH 7HPSTWWDWXUH 5DQJH a			f &
1RWH0HDVX D MCG+] DQG S SOLLHGHYUQVWRD JH& 0RXQWHG RQ JODVV HSR(\ 3& ERDUG ZLW(F) PRSSHU SDG			

*% - / 5HY


:RUOG ,QWH&JQLDMLRQDQDG

RATINGS AND CHARACTERISTICS CURVES

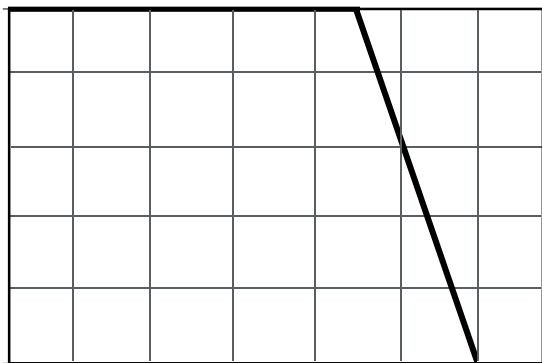


7 F & DVH 7 & HPS

Current Derating, Case

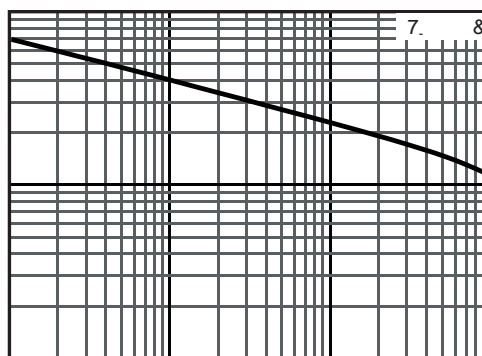


Typical Junction Capacitance

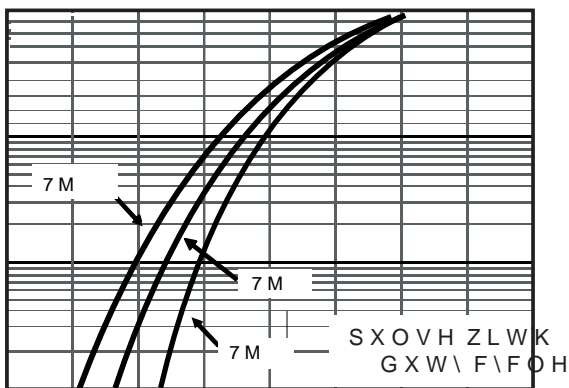

91, QVWDQWDQHR9R0V RDUZH UG

Typical Forward Voltage

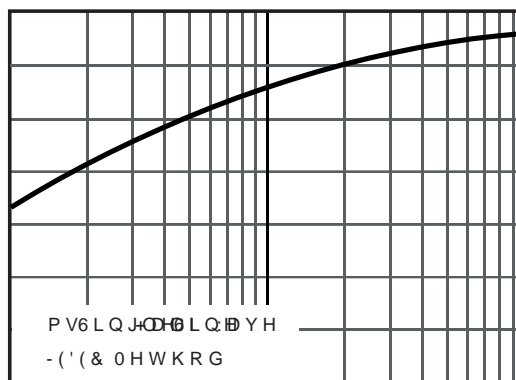

95 5HYH9R0V RDUZH 9ROWV

Typical Reverse Current

*% - / 5HY

:RUOG , QWH&JQLDMLFLQVHOG

3 \$ & . \$ * (2 8 7 / , 1 (' , 0 (1 6 , 2 1 6